




PRODUCT CODE
CO1601

www.holmanindustries.com.au

GLOSSARY

- A. UNIVERSAL TAP ADAPTOR
- B. TAP CONNECTION
- C. UNION NUT
- D. CONTROL DIALS
- E. BATTERY COMPARTMENT
- F. CLEAR SCREW-ON COVER
- G. SNAP-ON HOSE CONNECTION

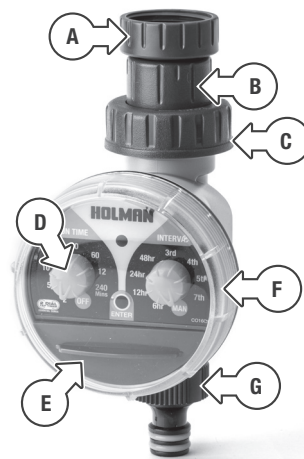

INSTALLATION

Make sure the washer is in place, then screw the **2 Dial Tap Timer** to the tap. Turn it clockwise (hand tighten only).

- ❗ There should be no need to use thread seal tape, as long as the tap seals onto the washer

BATTERY INSTALLATION

1. Hold the **Tap Timer** with the battery compartment facing you
2. Remove the **BATTERY COMPARTMENT** tray
3. Connect a 9V alkaline battery to the battery connector
4. Insert the connected battery and push in the **BATTERY COMPARTMENT** tray

- ❗ When changing a battery, the **Tap Timer** will hold the current program if you fit the battery within 2 minutes. When changing the battery, make sure the battery compartment stays dry

- ❗ Use only 9V alkaline batteries





SIMPLE 3 STEP PROGRAMMING

How to set run time and watering interval. Press **ENTER** to reference the start time.

- ❗ The **Tap Timer** will not run immediately after program is set. Program will commence after chosen interval duration has lapsed

1. Turn the **LEFT** dial to select **RUN TIME**. Select from 2 minutes to 240 minutes

2. Turn the **RIGHT** dial to select the **INTERVAL**. Select from every 6 hours to every 7 days

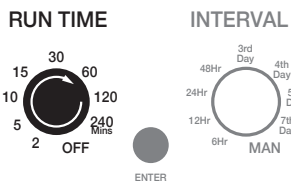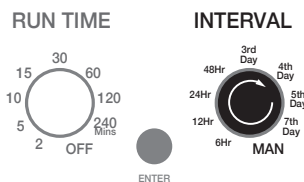

PROGRAMMING CONT.

3. Push **ENTER** the red LED will appear solid for three seconds to confirm your section. Watering will start at the selected interval


- ❗ The time that the **ENTER** button is pushed is used as a reference start time. To change the program, simply follow the same three steps



MANUAL START

1. Turn the **LEFT** dial to select **RUN TIME**
2. Turn the **RIGHT** dial to **MAN**
3. Press **ENTER**


- ❗ Running a manual run time will not change any program previously entered. Watering will begin and end at selected run time. No need to move the dials

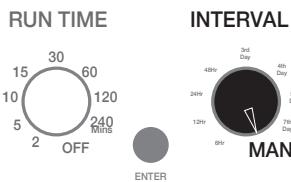

STOP OR NO WATERING

1. Turn the **RUN TIME** dial to the **OFF** position. While the **RUN TIME** dial is in the **OFF** position no watering will happen

- ❗ To re-commence a pre-set program, move the **RUN TIME** dial to any other position

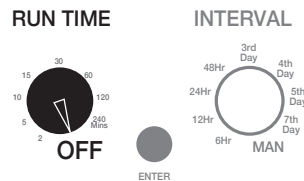

RED LED - OPERATING STATES

1. **SOLID** for three seconds: Confirms program and each time the auto program is changed
2. **FLASHING** every 30 seconds: All is running correctly
3. **FLASHING** every one second: Battery needs changing

FAULT FINDING

1. Ensure your tap is turned on
2. Ensure your battery is in good condition. Use only 9V alkaline battery

- ❗ When the **Tap Timer** is not using an automatic program, it must be in the **OFF** position. Turn the tap **OFF** when the **Tap Timer** is not in watering mode

TECHNICAL DATA

PRODUCT: Holman 2 Dial Tap Timer
 PRODUCT CODE: CO1601
 MAXIMUM WATER PRESSURE: 600 kPa
 MINIMUM WATER PRESSURE: 100 kPa
 BATTERY: Use a standard 9V alkaline battery
 FLUID: Only use cold water with NO added chemicals
 FREQUENCY OPTIONS: Every 6 hours, 12 hours, 24 hours, 48 hours, Every 3rd Day, Every 4th Day, Every 4th Day, Every 7th Day
 RUN TIME OPTIONS: 2, 5, 10, 15, 30, 60, 120 or 240 minutes.

EXTRA WATERING CYCLES

The manual operation mention previously can be used for running an extra cycle whilst the timer is programmed.

The manual cycle will run immediately after the **ENTER** button is pressed.

The **Tap Timer** will resume the automatic program once the manual time has elapsed.

CLEARING MEMORY

To clear an existing program, remove the battery and wait until the **Tap Timer** resets. (This can take up to 5 minutes.)

Alternatively, remove the battery and initiate a manual start which will clear the memory immediately.

We really appreciate having you as a customer, and would like to say thank you for choosing us. Should you have any questions about this product or its operation please call customer service on 1300 716 188

HOLMAN

For the #SMARTGARDENER

Head Office/Service

11 Walters Drive, Osborne Park WA 6017
 Tel: +61 8 9416 9999 Fax: +61 8 9416 9920
 support@holmanindustries.com.au
 www.holmanindustries.com.au